

AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS SINCE 1975

P.O. BOX 265 OGDENSBURG, NY U.S.A. 13669-0265 TEL: (315) 472-5270 FAX: (613) 226-2802 TEL: 1-800-265-6681 FAX: 1-800-561-1970 U.S.A. & CANADA

e-mail: info@avtechpulse.com

BOX 5120 STN. F OTTAWA, ONTARIO CANADA K2C 3H4 TEL: (613) 226-5772 FAX: (613) 226-2802

INSTRUCTIONS

MODEL AV-141C AMPLIFIER

S.N.:

WARRANTY

Avtech Electrosystems Ltd. warrants products of its manufacture to be free from defects in material workmanship under conditions of normal use. If, within one year after delivery to the original owner, and after prepaid return by the original owner, this Avtech product is found to be defective, Avtech shall at its option repair or replace said defective item. This warranty does not apply to units which have been dissembled, modified or subjected to conditions exceeding the applicable specifications or ratings. This warranty is the extent of the obligation or liability assumed by Avtech with respect to this product and no other warranty or guarantee is either expressed or implied.

Model AV-141C

General Instructions

The Model AV-141C amplifier is designed to amplify bipolar nanosecond rise time baseband pulses in the pulse width range of about 2.0 ns and higher and CW signals in the frequency range of DC to 600 MHz. The basic specifications for the unit are as follows:

Gain: > 20 dB

Peak output

voltage: ±3 Volt

Rise time: < 1.0 ns

Impedance level: 50 Ohms nominal

Bandwidth: DC to 600 MHz

Max. noise figure: $4 \text{ nV}/\sqrt{\text{Hz}}$

Prime power: +5.0 Volts, 50 mA max


-5.0 Volts, 50 mA max

Connectors: SMA

Size: 1.4 x 1.1 x 2.3 inches

- 1) The pulse mode operation of the unit was tested using the arrangement shown in Fig. 1.
- 2) <u>CAUTION</u>: The unit may be damaged if the DC voltage power supply voltage exceeds ±5.2 Volts or if the power supply voltages are reversed.

Fig. 1 AMPLIFIER TEST ARRANGEMENT

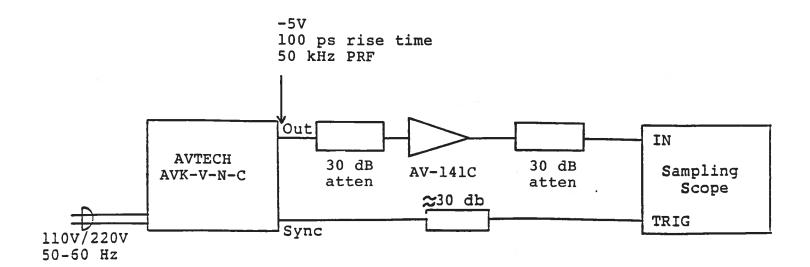

May 16/95

Edition A

Disk: AV-

Mome: 141CEDA. INS