



□ P. O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

☒ BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

Model AV-143-IBMC

Specifications

The Model AV-143-IBMC amplifier is designed to amplify positive baseband pulses in the pulse width range of about 100 nsec and higher. The basic specifications for the unit are as follows:

Gain:	x6 (voltage)
Bandwidth:	DC to 15 MHz
Peak output voltage (to 1000 ohms or higher):	+30 volts
Rise time:	< 60 ns
Input impedance:	50 ohms
Prime power:	+24 V, 500 mA (max)
Connectors:	SMA
Size:	1.7 x 2.6 x 4.3 inches

For output amplitude in the range of 25 to 31 Volts, the one turn front panel OS pot may be used to largely eliminate overshoot on the output. At time of shipping the pot was adjusted for 5 Volts in; 30 Volts out, with minimal overshoot.

CAUTION: The unit should be bolted to a heat sink to insure that it does not overheat.

AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
ENGINEERING - MANUFACTURING

□ P.O. BOX 265
OGDENSBURG
NEW YORK
13669
(315) 472-5270

□ BOX 5120, STN. "F"
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

February 10, 1992.

Nathan Caswell
IBM Corporation
T.J. Watson Research Center
P.O. Box 218
Yorktown Heights, NY 10598

Tel: 914-681-5515
Fax: 914-681-5576

Dear Nathan:

Following our telephone conversation of February 5, I am pleased to provide a price and delivery quotation for two special purpose amplifiers meeting the following specifications:

A)

Model designation:	AV-143-IBMB.
Voltage gain:	x6. Non-inverting. Accepts +5 Volt input pulse and provides +30 Volt output pulse to a high load impedance ($R_L > 1 K$).
Maximum output:	+30 Volts.
Rise time:	≤ 80 ns.
Settling time and overshoot:	$\leq 1/3$ of that for Model AV-143-IBMA.
Bandwidth:	DC to 10 MHz.
Input impedance:	50 Ohms.
Prime power:	+24V DC, 500 mA max.
Package size and material:	1.7" x 2.6" x 4.3", cast aluminum, blue enamel finish. Suitable for "briefcase" environment.
Input and output connectors:	SMA.

DC input connector: Solder terminal.

Other: See standard Model AV-143, page 94, Cat. No. 8.

Price: \$1,498.00 US,
FOB destination (i.e. on your
doorstep).

Delivery: 3 weeks ARO.

B)

Model designation: AV-143-IBMC.

Voltage gain: x6. Non-inverting. Accepts +5 Volt
input pulse and provides +30 Volt
output pulse to a high load impedance
($R_L > 1 K$).

Maximum output: +30 Volts.

Overshoot and settling time: ≤ 0.1 of that for Model AV-143-IBMA.
Includes a one turn control which
must be adjusted to set overshoot to
minimum value.

Rise time: ≤ 60 ns.

Bandwidth: DC to 15 MHz.

Input impedance: 50 Ohms.

Prime power: +24V DC, 500 mA max.

Package size and material: 1.7" x 2.6" x 4.3",
cast aluminum, blue enamel finish.
Suitable for "briefcase" environment.

Input and output
connectors: SMA.

DC input connector: Solder terminal.

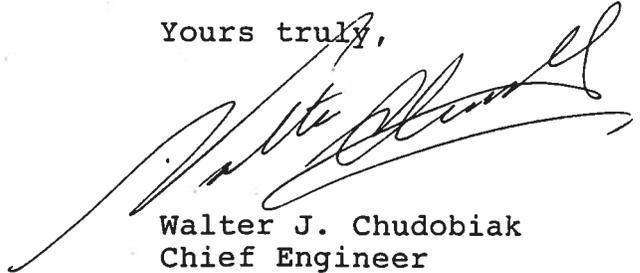
Other: See standard Model AV-143, page 94,
Cat. No. 8.

Price: \$1,698.00 US,
FOB destination (i.e. on your
doorstep).

Delivery: 3 weeks ARO.

Thank you for your interest in our products. Please call me again if you require any additional information or modifications to the above quotation.

Yours truly,

A handwritten signature in black ink, appearing to read 'Walter J. Chudobiak', written in a cursive style with a long horizontal flourish extending to the left.

Walter J. Chudobiak
Chief Engineer

WJC:pr
Encl. Cat. No. 8S1
Price list

Sept 2/92