



AVTECH ELECTROSYSTEMS LTD.
NANOSECOND WAVEFORM ELECTRONICS

□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

✕ BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

INSTRUCTIONS


MODEL AVD-GSSB2 MONOCYCLE GENERATOR

S.N.:

WARRANTY

Avtech Electrosystems Ltd. warrants products of its manufacture to be free from defects in material and workmanship under conditions of normal use. If, within one year after delivery to the original owner, and after prepaid return by the original owner, this Avtech product is found to be defective, Avtech shall at its option repair or replace said defective item. This warranty does not apply to units which have been disassembled, modified or subjected to conditions exceeding the applicable specifications or ratings. This warranty is the extent of the obligation or liability assumed by Avtech with respect to this product and no other warranty or guarantee is either expressed or implied.

MONOCYCLE GENERATOR TEST ARRANGEMENT

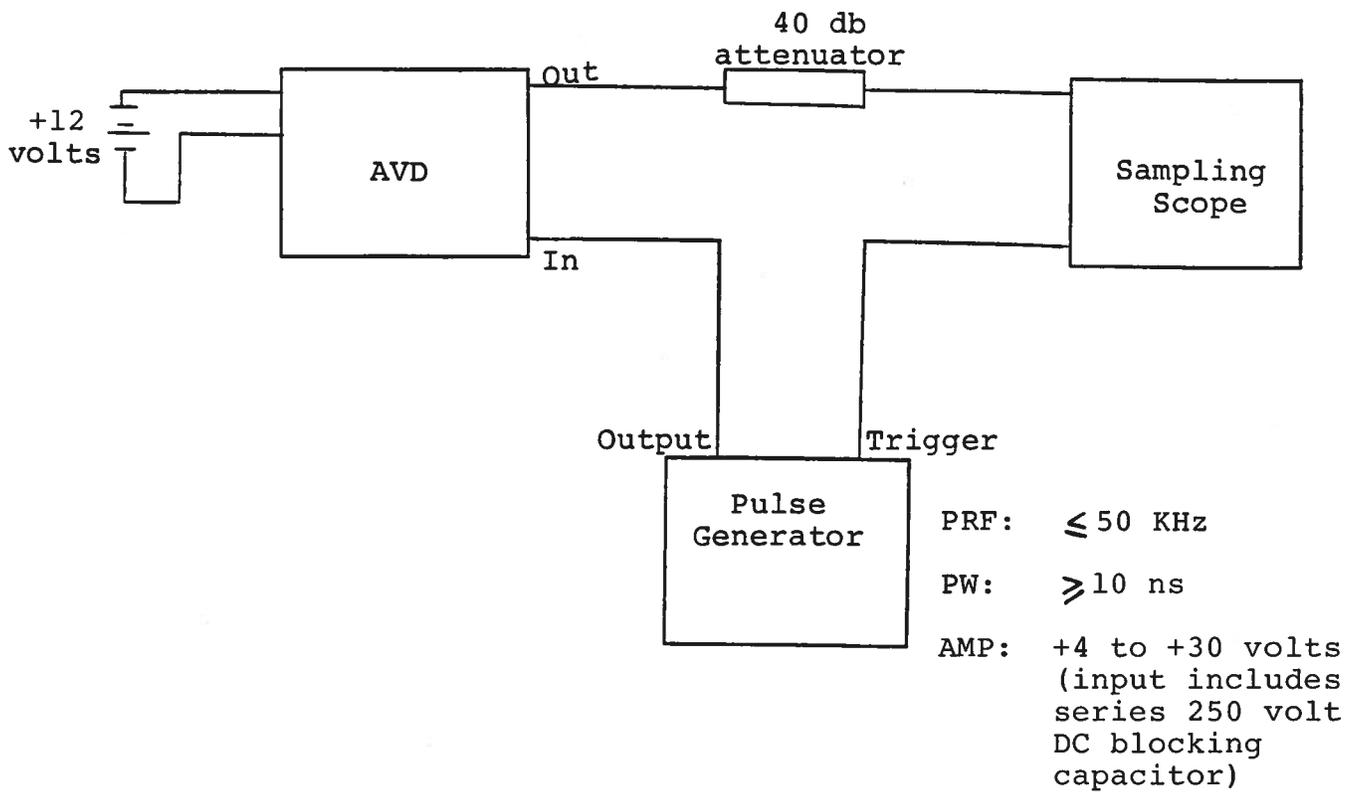

Notes:

- 1) The bandwidth capability of components and instruments used to display the monocycle generator output signal (attenuators, cables, connectors, etc.) should exceed 10 GHz.
- 2) The use of a 40 db attenuator will insure a peak input signal to the sampling scope of less than one volt.
- 3) In general, the pulse generator delay control should be set in the 100 nsec range. Other settings should be as shown in the above diagram. The monocycle generator output is delayed with respect to the trigger input signal by about 75 nsec (typically).
- 4) The monocycle generator can withstand an infinite VSWR on the output port.
- 5) The output frequency can be adjusted (slightly) by rotating the front panel 10 turn trim pot. Clockwise rotation reduces the output frequency (and reduces the output spurious level).

Prime power: +12 volts, 130 mA.
-12 volts, 30 mA.

Note that internal regulators are employed to render the output waveform highly non-susceptible to input voltage variations.

Package size: 1.7" x 3" x 6".
Cast aluminum, blue enamel.

Package size has been increased because of spurious control requirements.

Connectors: Input, output: SMA.
Power: Solder terminals.


Other: See Model AVE, pages 86 & 87,
Cat. No. 8.

Price: \$1,695.00 US,
FOB destination.

Delivery: 30-45 days ARO.

Thank you for your interest in our products. Please call me again if you require any additional information.

Rgds

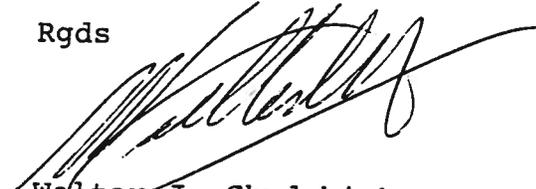

Walter J. Chudobiak
Chief Engineer

WJC:pr

08.14.91