



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com>

□ P.O. BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802


INSTRUCTIONS

MODEL AVX-M4-S-MUA

The AVX-M4 transformer is designed to provide a match from 50 Ohms to 3.0 Ohms with a rise time of 0.3 ns or less with pulse widths as high as 100 ns. The 3.0 Ohm load should be soldered between the centre conductor and either ground pad of the output microstrip line.

CAUTION:

- 1) Use minimal heat when soldering to the transformer.
- 2) The input amplitude must not exceed 30 Volts
- 3) The input pulse width must not exceed 100 ns
- 4) The input PRF must not exceed 5 KHz

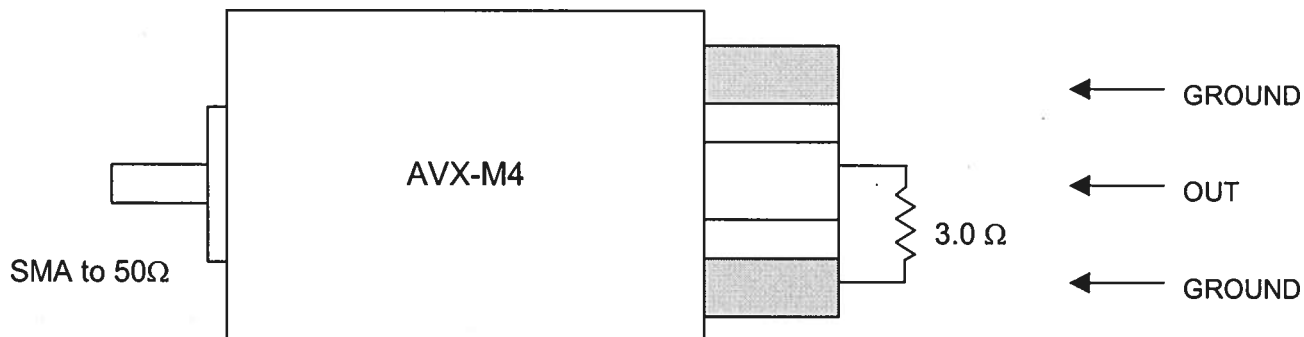

April 14, 2003