



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970
U.S.A. & CANADA

e-mail: info@avtechpulse.com

✕ BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802


INSTRUCTIONS

MODEL AVX-M3-LTA

The AVX-M3-LTA transformer is designed to provide a match from 50 Ohms to 3.0 Ohms with a rise time of 2 ns or less with pulse widths as high as 100 ns. The 3.0 Ohm load should be soldered between the centre conductor and either ground pad of the output microstrip line.

CAUTION:

- 1) Use minimal heat when soldering to the transformer
- 2) The input amplitude must not exceed 350 Volts
- 3) The input pulse width must not exceed 100 ns
- 4) The input PRF must not exceed 10 kHz

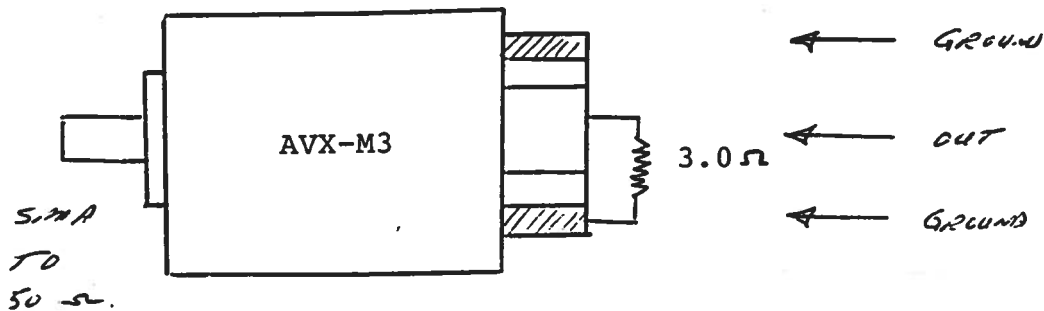

June 12/97

Disk: AVX-M, AVX-B ...

Name: AVXM3LTA.INS