



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-151J-C
S.N.: 11075
Date: November 30, 2004

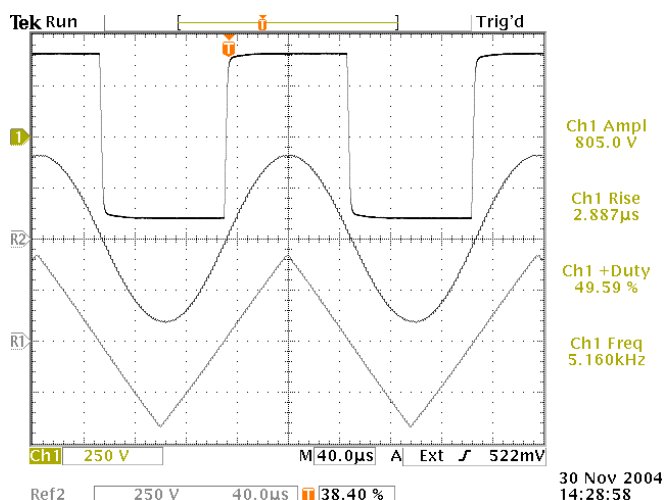

Square, Sine, and Triangle outputs into a 10 kΩ load.
5 kHz. 250 V/div, 40 us/div.

References levels: 10%, 90%.

- a) Output Signal Amplitude: 0 to ±400V,
to > 10 kΩ
- b) Waveforms: sine, triangle, square
- c) Rise Time: < 3.5 us (for square wave)
- d) Fall Time: < 3.5 us (for square wave)
- e) PRF: DC to 50 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.