



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-EB7-B-DIP-FP-MSC  
Type: Reverse Recovery Test System  
S.N.: 11999  
Date: July 7, 2008

Output Amplitude: to +/- 200 mA  
Pulse Width (FWHM): 100 ns (reverse)  
Rise Time (10%-90%): ≤ 1 ns (at mainframe)  
PRF: 1 Hz – 5 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms for the 1N5772

Anode = pin 1, Cathode = pin 2. +/- 200 mA,  
using the AVX-TRR-DIPFP test jig.

5 V/div (= 100 mA/div), 10 ns/div.

Anode = pin 1, Cathode = pin 2. +/- 200 mA,  
using the AVX-TRR-SOCK test jig.

5 V/div (= 100 mA/div), 10 ns/div.

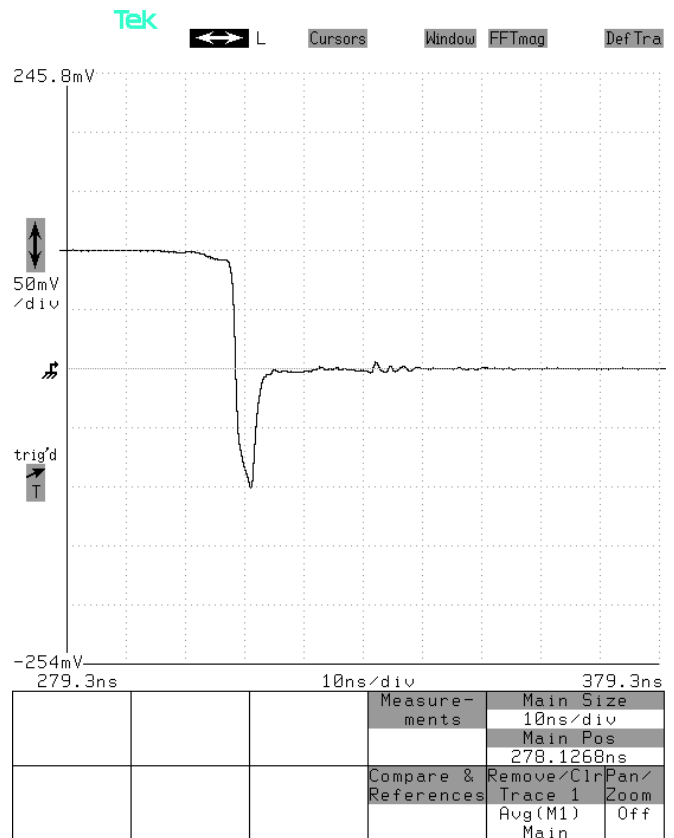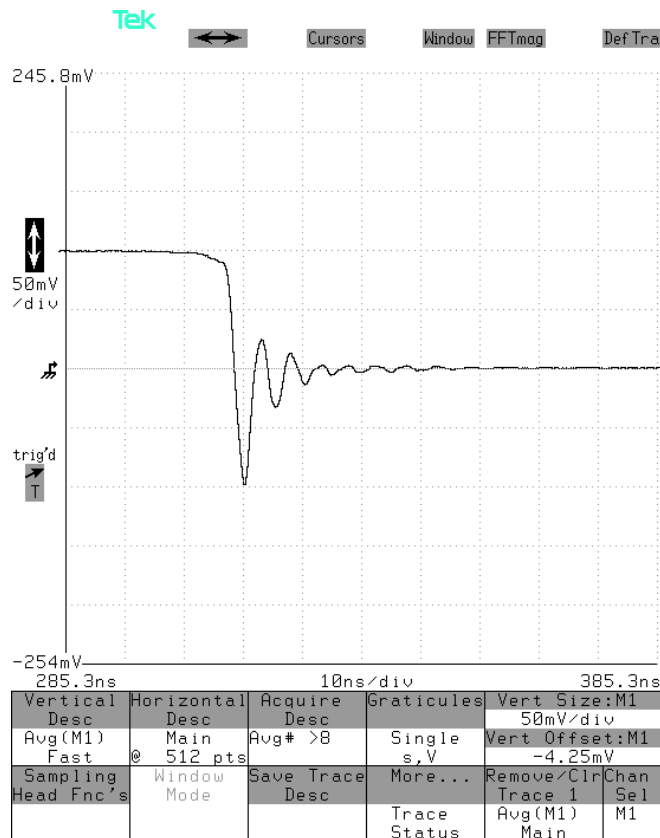

See the manual for discussion of the waveforms and waveforms for other devices.