



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

☐ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

☒ BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/


PERFORMANCE CHECKSHEET

Model: AVX-MRB1
Type: Current-Doubling Pulse Transformer
S.N.: 13701
Date: March 27, 2018

Impedance match: 50 Ω to 12.5 Ω
Maximum input: 100V
Maximum output: 50V / 4A
Maximum pulse width: 5 us
Rise time (20%-80%): < 1 ns
Drop: < 5 %


Basic specifications: →

Rise Time Test

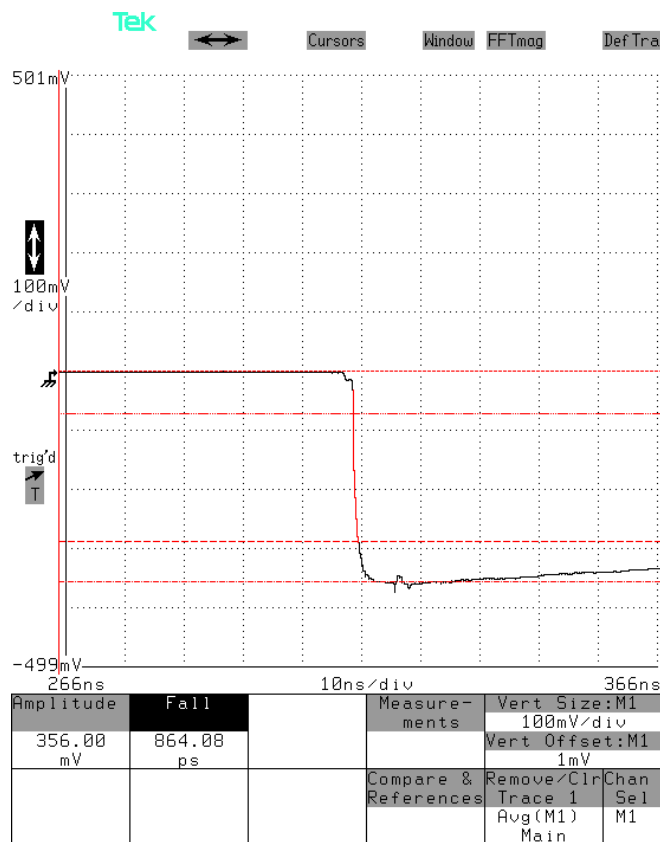

Output of AVX-MRB1 into 12.5 Ohms, in response to a -7.2V pulse with ~100 ps rise time. 1 V/div (100 mV/div × 20 dB), 10 ns/div.

Wide High-Voltage Pulse Test

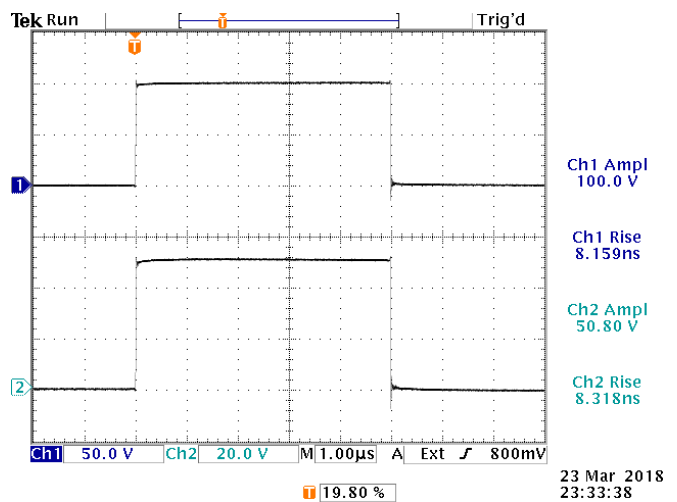

Top: +100V, 5 us pulse from model AV-1010-B. 50 V/div, 1 us/div.

Bottom: +50V output from AVX-MRB1 into a 12.5 Ohm load. 20 V/div, 1 us/div.