



info@avtechpulse.com  
http://www.avtechpulse.com/


Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVX-MRB5-CC1  
Type: Current-Doubling Transformer  
S.N.: 14388  
Date: September 11, 2023


Maximum Pulse Width Test:

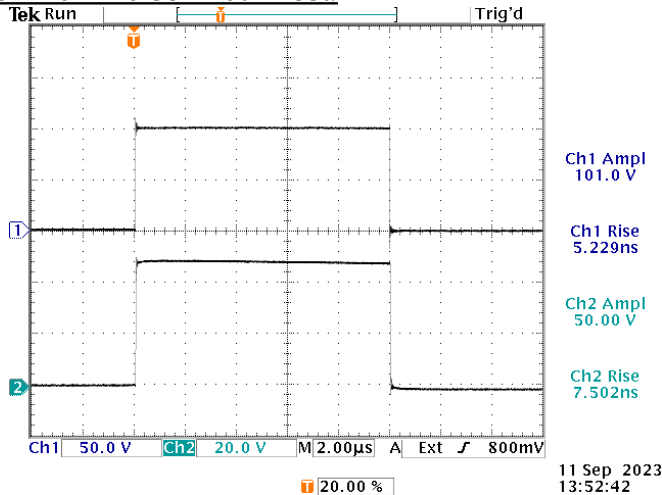

- a) Output Signal Amplitude: 0 to ±50V  
( $R_{LOAD} = 12.5\Omega$ )
- b) Pulse Width (FWHM): 10 us maximum
- c) Rise Time (20%-80%): ≤ 20 ns
- d) Fall Time (80%-20%): ≤ 20 ns

Top: +100V input pulse from an AV-1010-B pulser  
Bottom: AVX-MRB5 output waveform into 12.5Ω  
(providing 50V / 12.5Ω = 4A)

Rise Time Test:

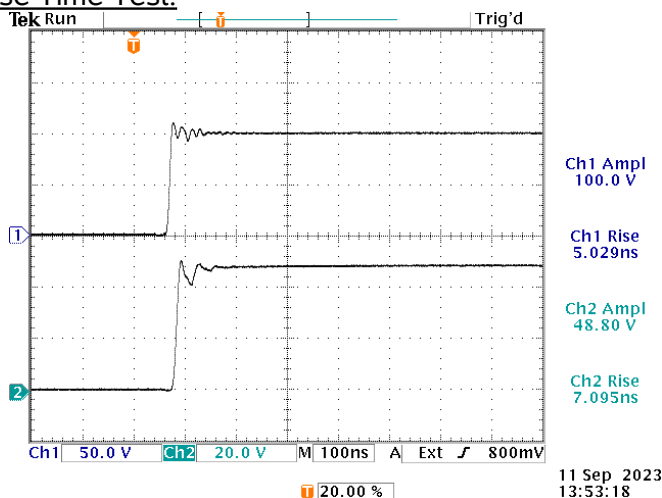

Same waveform as above, but scaled at 100 ns/div.

Reference levels: 20%, 80%