




info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5


PERFORMANCE CHECKSHEET

Model: AVR-5B-B-PN-R50-VXI-AC18
Type: High Voltage Pulse Generator
S.N.: 13962
Date: February 26, 2020

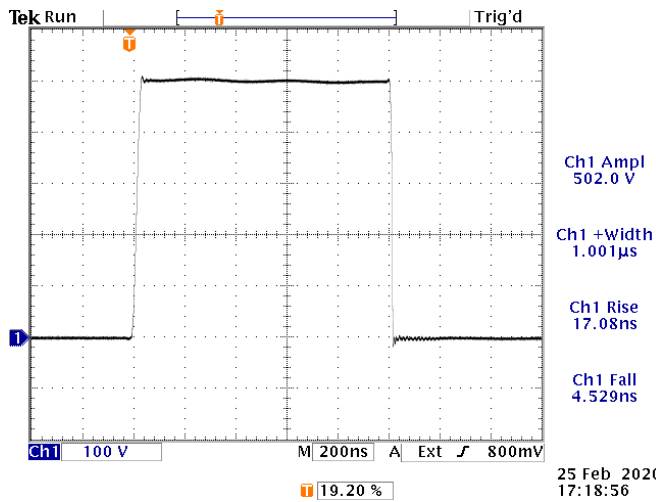


1 kHz, 1 us, +500V into a 50Ω load.
100 V/div, 200 ns/div.

- a) Output Signal Amplitude: up to ±500V
- b) Pulse Width (FWHM): 100 ns - 100 us, 1% duty cycle
- c) Rise Time (20%-80%): < 30 ns
- d) Fall Time (20%-80%): < 30 ns
- e) PRF: 1 Hz - 10 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

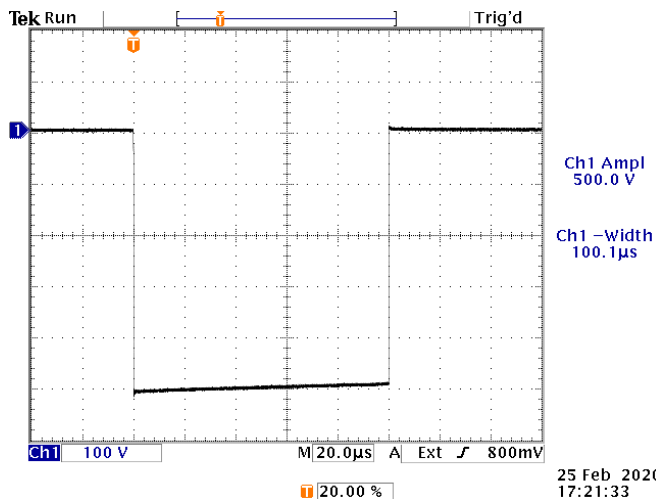

100 Hz, 100 us, -500V into a 50Ω load.
100 V/div, 20 us/div.

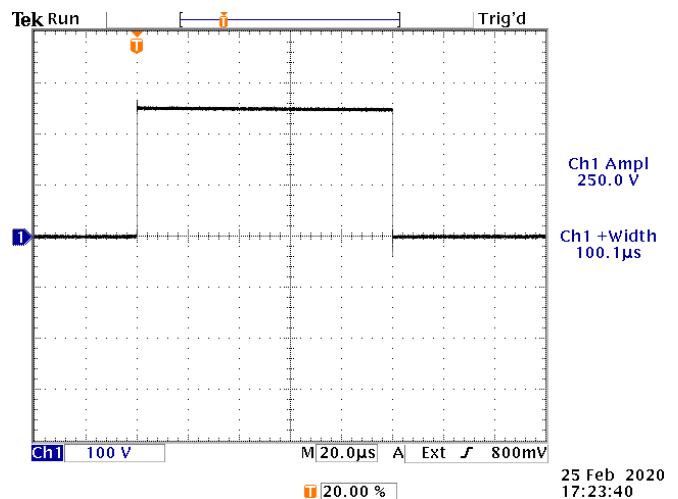

100 Hz, 100 us, +500V into a 50Ω load, with 50Ω output impedance. 100 V/div, 20 us/div.

References levels: 20%, 80%.