



info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AV-1011B1-B-AC22  
Type: High-Speed Pulse Generator  
S.N.: 14330  
Date: March 15, 2023

Output Amplitude: up to ±100V, to 50Ω  
Pulse Width (FWHM): 100 ns – 1 ms  
Rise Time (20%-80%): ≤ 2 ns  
Fall Time (80%-20%): varies  
PRF: 1 Hz - 100 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

10 kHz, +100V, 100 ns, to 50 Ohms,

10 kHz, -100V, 100 ns, to 50 Ohms,


20 ns/div. 50 V/div (50 mV/div × 60 dB):

20 ns/div. 50 V/div (50 mV/div × 60 dB):

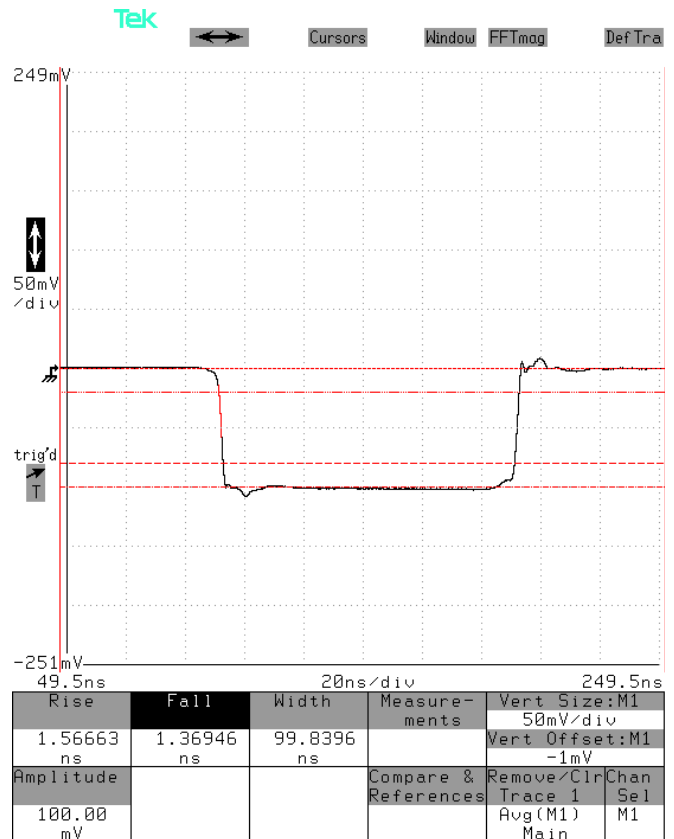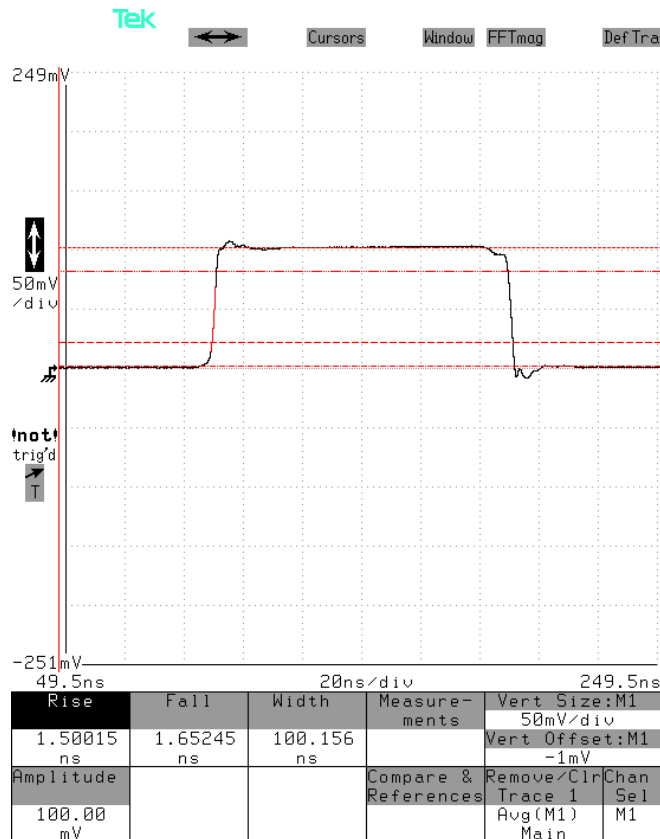

10 Hz, +100V, 1 ms, to 50 Ohms,

200 us/div. 50 V/div:

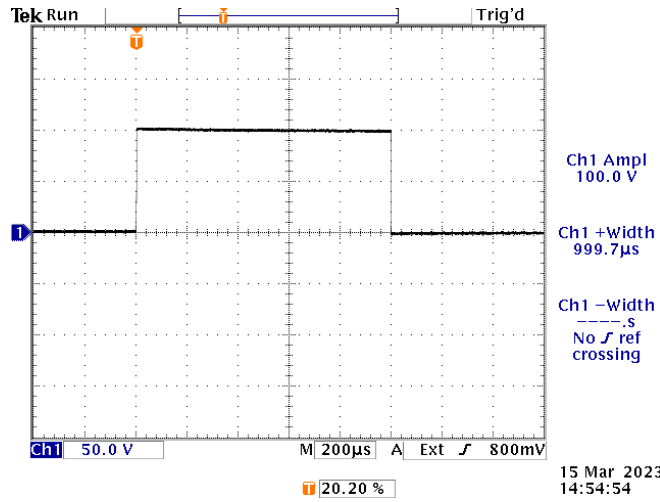

10 Hz, -100V, 1 ms, to 50 Ohms,

200 us/div. 50 V/div:

