



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/


PERFORMANCE CHECKSHEET

Model: AVO-6C-B-P-AC22  
Type: High-Current Pulse Generator  
S.N.: 13554  
Date: March 30, 2017

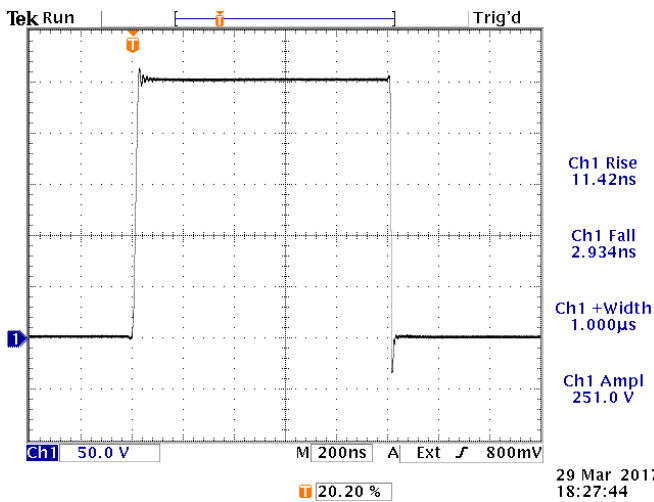

1 kHz, 1 us, +250V into a 50Ω load (no output module).  
50 V/div, 200 ns/div.

- a) Output Signal Amplitude: up to +250V
- b) Pulse Width (FWHM): 50 ns - 5 us, 1% duty cycle
- c) Rise Time (20%-80%): < 12 ns
- d) Fall Time (20%-80%): < 12 ns
- e) PRF: 1 Hz - 10 kHz
- f) Jitter, Stability: OK

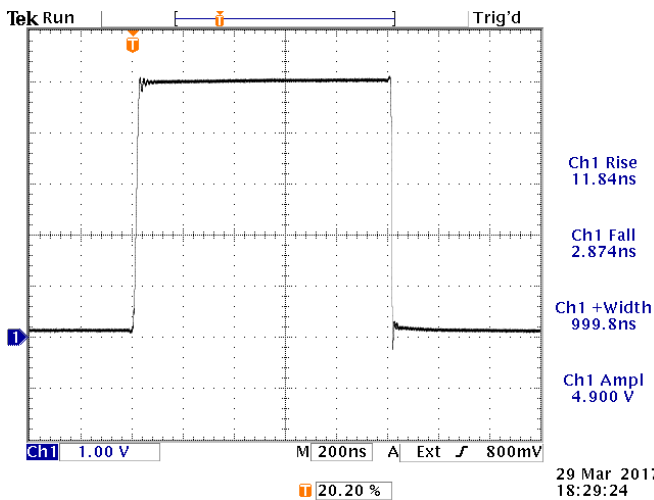

Output of Tektronix CT-2 current probe, measuring a +4.9A current pulse through a 1N5819 diode soldered to the output module, in response to +250V input.  
1V & 1A/div, 200 ns/div.

- g) Prime Power: 100-240V AC, 50-60 Hz.

Reference levels: 20%, 80%.