


PULSE GENERATOR
PERFORMANCE CHECK

Model: AVP-25-P-0S-ECL

S.N.: 6442

Date: SEPT 1/92

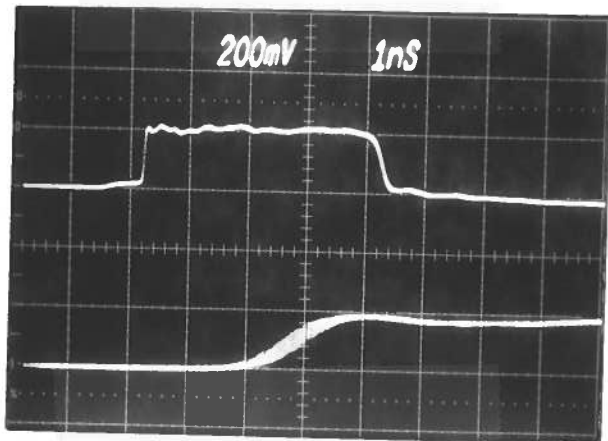

- a) Output signal amplitude:
0 TO +2 VOLTS
- b) Pulse width:
0.2 TO 4.0 NS
- c) Rise time:
 ≤ 40 PS
- d) Fall time:
 ≤ 135 PS
- e) PRF:
0 TO 1.0 MHZ
- f) Jitter, stability:
OK
- g) Prime power:
+ 15 VOLTS
400 mA (max)

20 db ATTEN
 \therefore 2 VOLTS/DIV
 PRF = 1.0 MHZ

$$T_{RT} = \sqrt{T_{R25}^2 + T_{SCOPE}^2 + T_{ATTEN}^2}$$

$$\approx 50 \text{ PS (20-80\%)}$$

$$T_{SCOPE} = 25 \text{ PS}$$

18 GHz ATTEN + CABLES

\therefore CONC THAT $T_{R25} \leq 40 \text{ PS}$