



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-1000-C
Type: General-Purpose Pulse Generator
S.N.: 11651
Date: November 27, 2006


Rise Time Test:

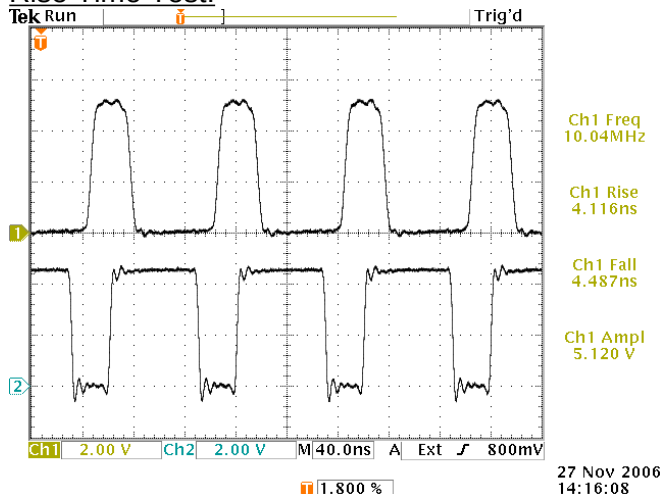

Top: +5V into 50Ω, 10 MHz, 2 V/div, 40 ns/div.
Bottom: NOT TTL OUT, 2 V/div, 40 ns/div.


- a) Output Signal Amplitude: 0 to ±10V, plus TTL and ECL outputs.
- b) DC Offset: 0 to ±10V
- c) Pulse Width: 10 ns - 1 s
- d) Rise Time: 5 ns - 1 ms
- e) Fall Time: 5 ns - 1 ms
- f) PRF: 1 Hz - 50 MHz
- g) Jitter, Stability: OK
- h) Prime Power: 100-240V AC, 50-60 Hz.

50 MHz Test:

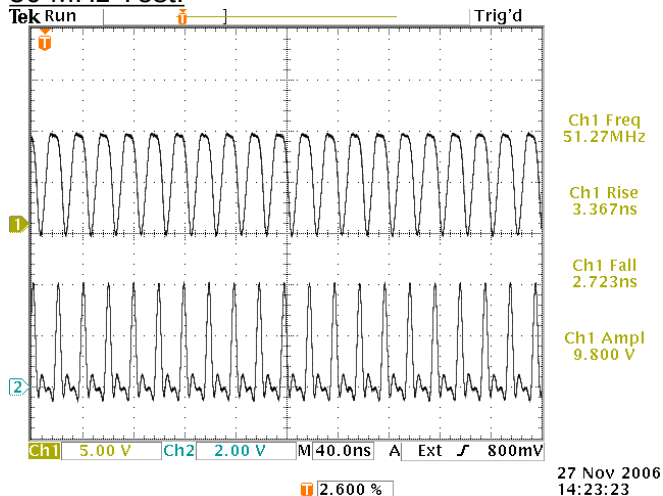

Top: +10V into 50Ω, 5 V/div, 40 ns/div.
Bottom: TTL OUT, 2 V/div, 40 ns/div.

Variable Rise and Fall Time Test

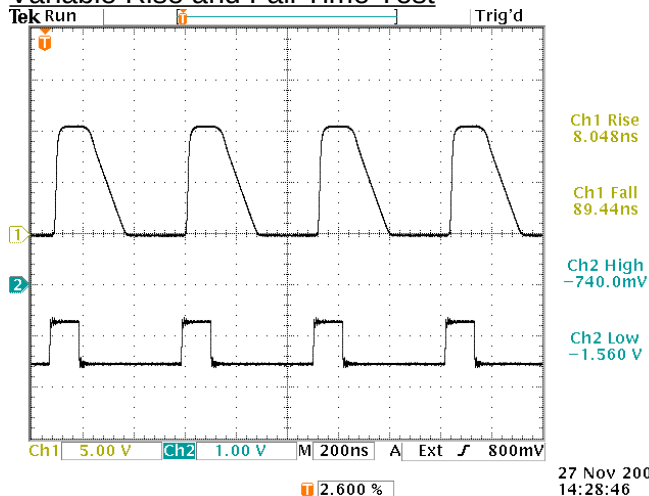

Top: +10V into 50Ω, 5 V/div, 200 ns/div.
Bottom: ECL OUT, 1 V/div, 200 ns/div.

References levels: 20%, 80%.