



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVL-5-B-M-PN-HIKA
Type: Ultra-High-Speed Pulse Generator
S.N.: 12758
Date: January 24, 2012

Output Amplitude: 0 to $\pm 400V$, to 50Ω
Pulse Width (FWHM): 8 – 100 ns
Rise Time (20%-80%): ≤ 2 ns
Fall Time (80%-20%): ≤ 5 ns
PRF: 1 Hz - 2 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

2 kHz, 8 ns, +400V,

2 kHz, 100 ns, +400V,


20 ns/div. 200 V/div (200 mV \times 60 dB):

20 ns/div. 200 V/div (200 mV \times 60 dB):

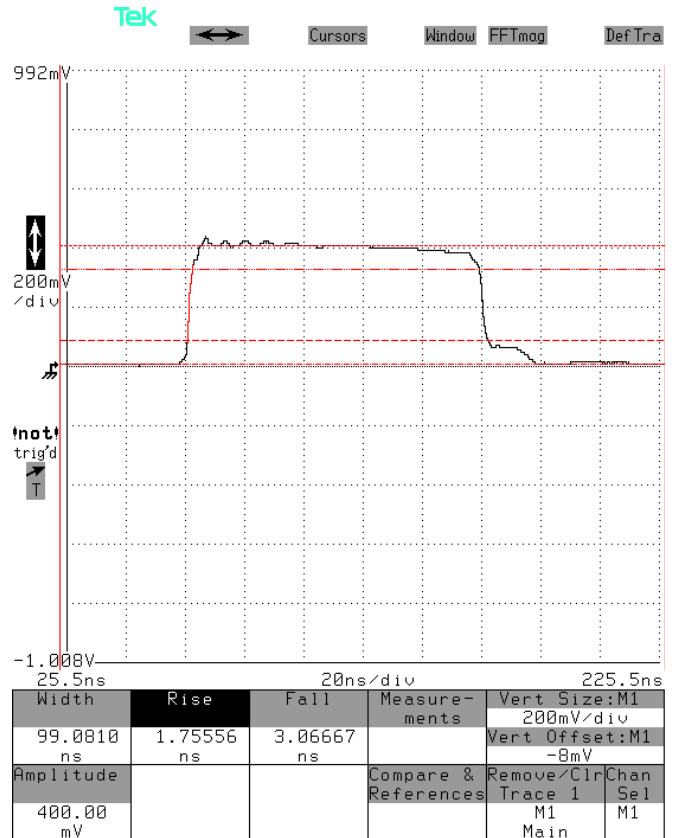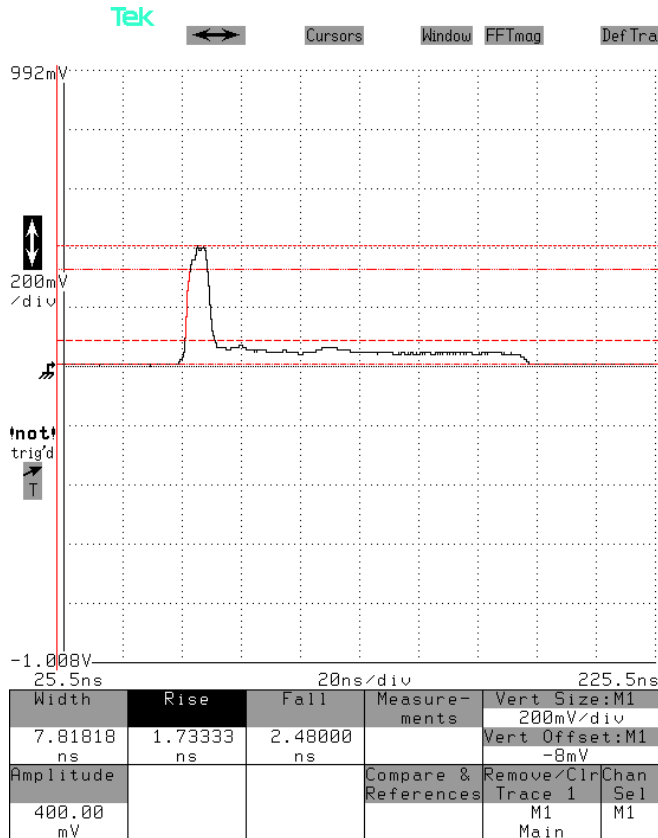

2 kHz, 8 ns, -400V,

20 ns/div. 200 V/div (200 mV × 60 dB):

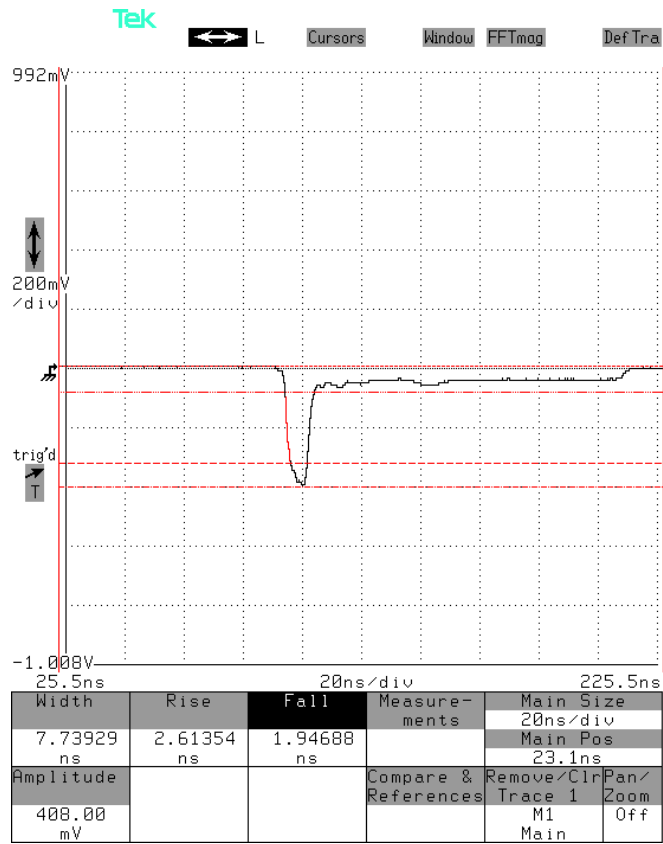

2 kHz, 100 ns, -400V,

20 ns/div. 200 V/div (200 mV × 60 dB):

