



P.O. BOX 265 OGDENSBURG, NY U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl) FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE OTTAWA, ONTARIO CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-107C-B-AC22-P-M-PW1
Type: Pulsed Laser Diode Driver
S.N.: 12936
Date: November 13, 2012


Rise & Fall Time Test

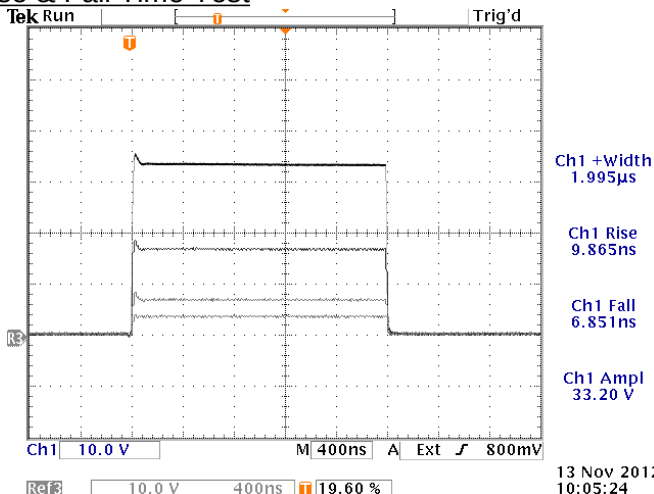

+1A, +2A, +5A, +10A into a 3.3 Ohm load installed on the rear panel. 2 us pulse width. 10 V/div, 400 ns/div.

- a) Output Signal Amplitude: 0 to +10A
b) Pulse Width (FWHM): 100 ns to 20 us
c) Rise Time (20%-80%): < 20 ns
d) Fall Time (80%-20%): < 20 ns
e) PRF: 1 Hz – 5 kHz
f) Jitter, Stability: OK
g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

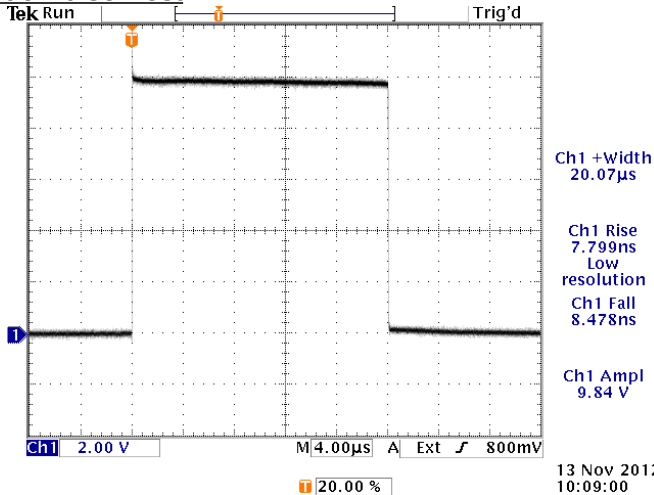

+10A into the supplied AV-CTL1-ENC test load (0.975 Ohms). 20 us pulse width. 2 V/div, 4 us/div.

References levels: 20%, 80%.