



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVOZ-A2-B-PN
Type: High-Current Pulse Generator
S.N.: 13344
Date: September 24, 2015

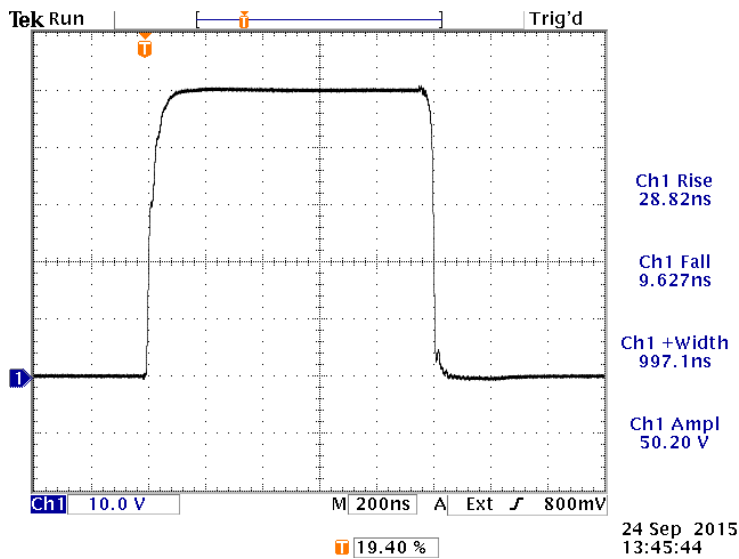

+50V into 1.0 Ohms, 1 us PW, 1 kHz, using the AV-CLZ1-60 accessory cable. 10 V/div, 200 ns/div.

a) Output Signal Amplitude: up to +50V

b) Pulse Width (FWHM): 40 ns – 1 us


c) Rise Time (20%-80%): < 30 ns

d) Fall Time (80%-20%): < 30 ns

e) PRF: 1 Hz - 20 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

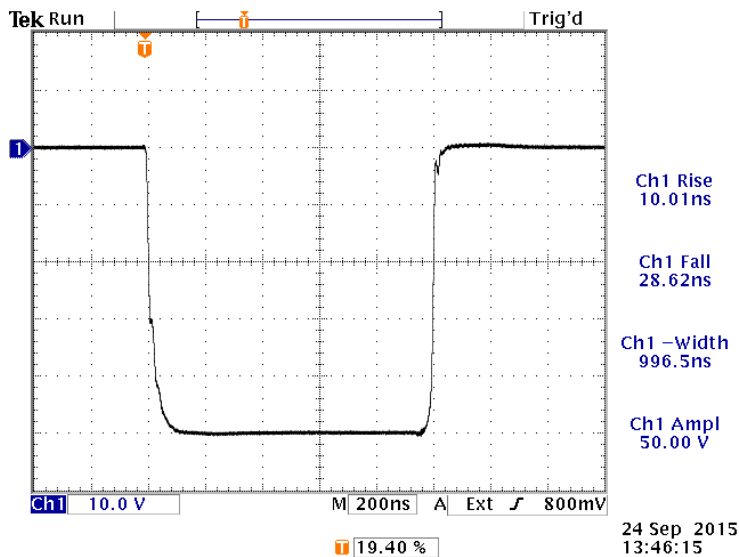

-50V into 1.0 Ohms, 1 us PW, 1 kHz, using the AV-CLZ1-60 accessory cable. 10 V/div, 200 ns/div.

References levels: 20%, 80%.