



info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVR-E2-B-W1-PN-OT
Type: Ultra-High-Speed Pulse Generator
S.N.: 14023
Date: November 26, 2020

Output Amplitude: up to $\pm 50V$, to 50Ω
Pulse Width (FWHM): 1 ns – 200 ns
Rise Time (20%-80%): ≤ 500 ps
Fall Time (80%-20%): ≤ 1 ns
PRF: 1 Hz - 200 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

20 kHz, 1 ns, > +50V,

20 kHz, 3 ns, > -50V,


2 ns/div. 20 V/div (200 mV/div \times 40 dB):

2 ns/div. 20 V/div (200 mV/div \times 40 dB):

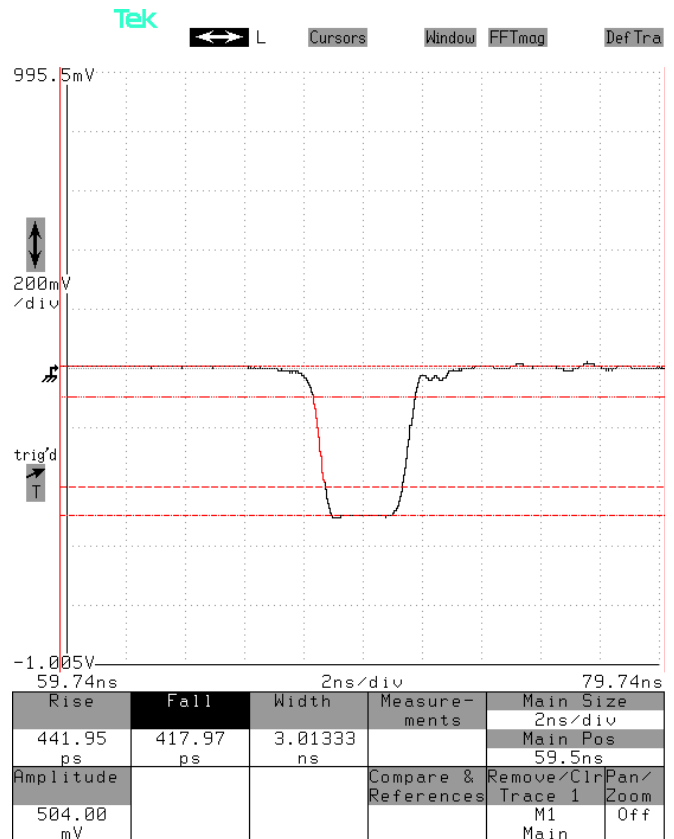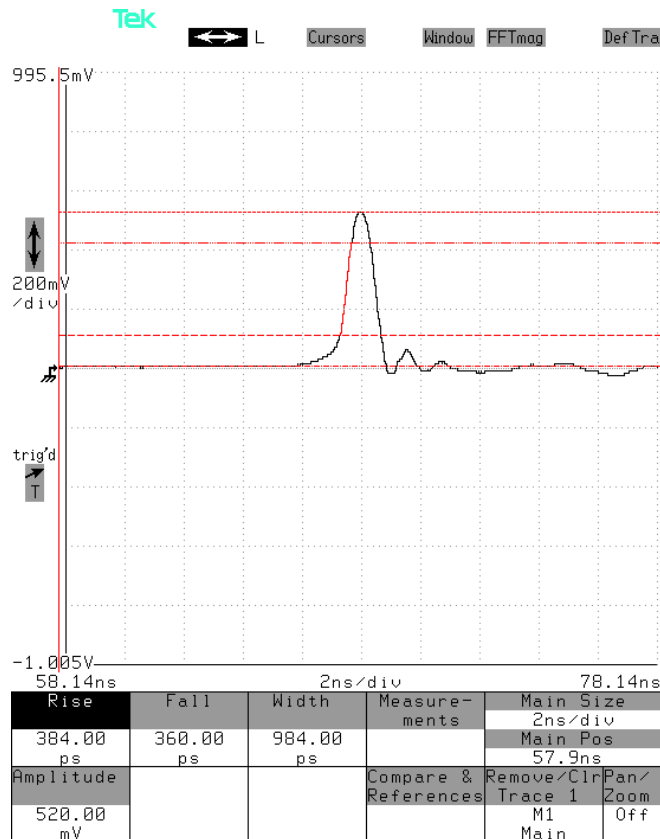

100 kHz, 25 ns, > +50V,

5 ns/div. 20 V/div (200 mV/div × 40 dB):

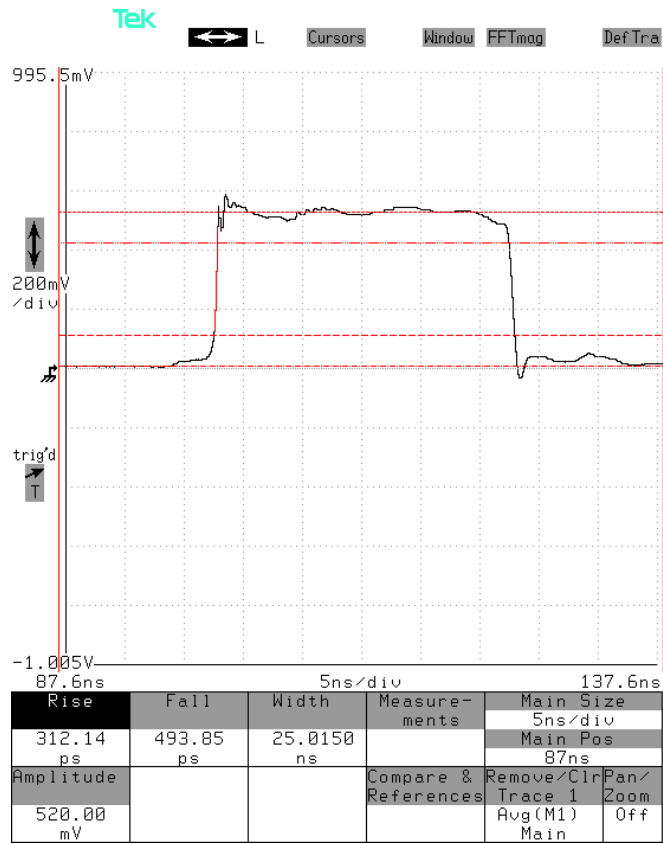

100 kHz, 200 ns, > -50V,

50 ns/div. 20 V/div (200 mV/div × 40 dB):

