



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
http://www.avtechpulse.com


☒ P.O. BOX 5120 STN. F
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

INSTRUCTIONS

MODEL AVX-MRB5-NWUA

This transformer is designed to transform the output of the AV-1010-C pulse generator from 100 Volts (max) to 50 Ohms to 50 Volts to 12.5 Ohms (for a max load current of 4 Amps). The 12 Ohm load should be soldered between the center conductor and either ground pad of the output microstrip line. Alternatively, the load may be connected to the SMA output connector adjacent to the output microstrip line. Note that the input pulse width must not exceed 10 us. The output DC bias is applied to the DC SMA connector adjacent to the input BNC connector. Note that the following DC ratings must not be exceeded:

Max DC Voltage: ± 50 Volts
Max DC Current: ± 100 mA

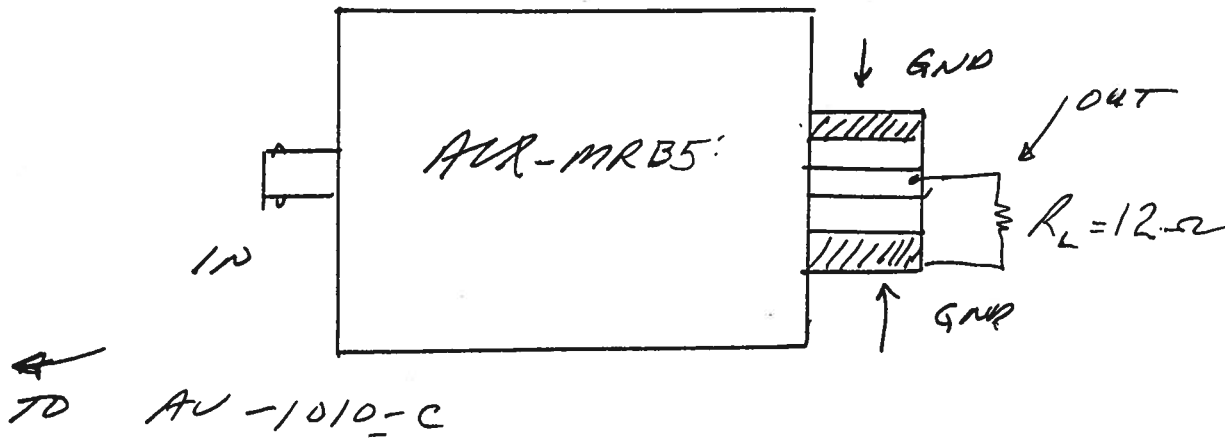

June 2197

Disk: AUX-M, AUX-B...

Name: AUXMRBSN.INS